


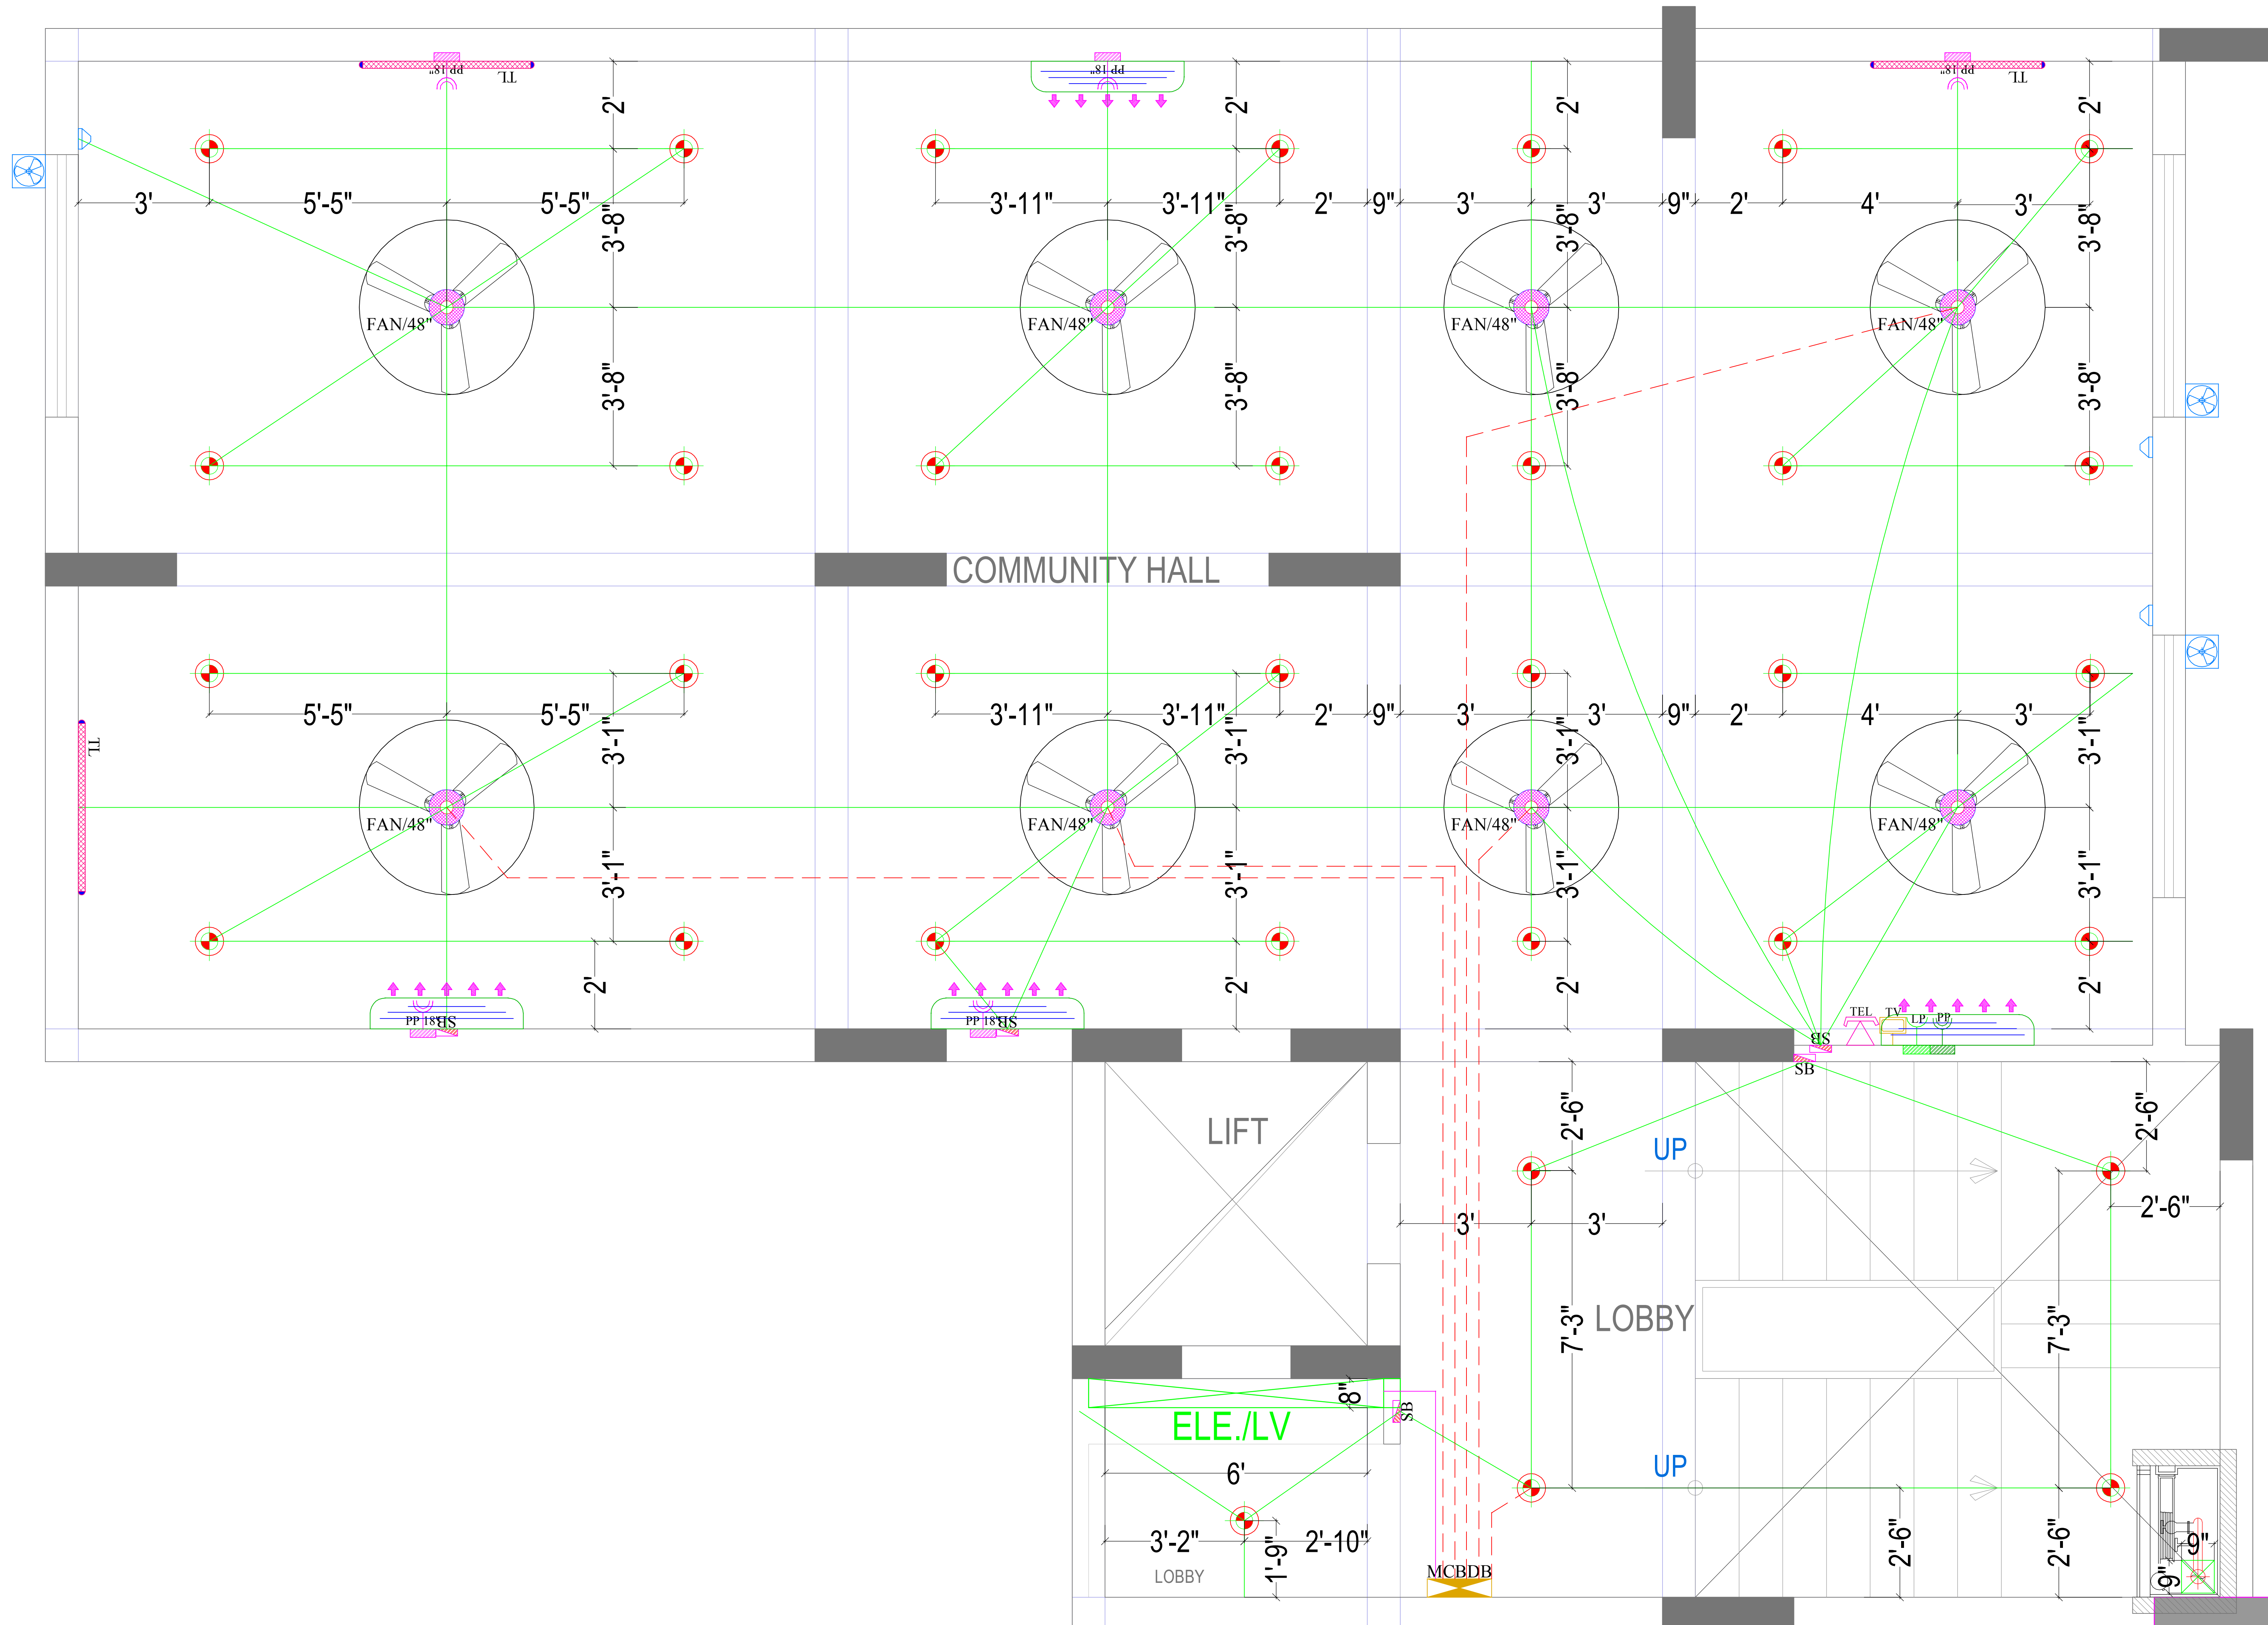

BASEMENT FLOOR PLAN

1No. Telephone Jack, 1No. Data Jack For Computer Point, 2No. 6A Socket Controlled by 1No. 16A Switch For UPS & 1No. 16A 5Pin Socket Controlled by 1No. 16A Switch For Raw

SET-1

8 MODULE BOX SIZE 9" X 3", PLATE SIZE 245 X 90 MM

+36"

1No. Telephone Jack, 1No. TV Coaxial Jack, 1Nos. 6A Socket Controlled by 1No. 6A Switch & 1Nos. 16A 5Pin Socket Controlled by 1No. 16A Switch

SET

6 MODULE BOX SIZE 8" X 3", PLATE SIZE 226 X 90 MM

+18"

LEGENDS:

Mounting Height	No.	ID	Symbol	Description
IN RCC SLAB		CONDUIT		Rigid PVC 25mm dia. Conduit /1.5 sqmm Wire For Light Points
IN RCC SLAB		CONDUIT		Rigid PVC 25mm dia. Conduit /2.5 sqmm Wire For Light Circuits
IN RCC SLAB		CONDUIT		Rigid PVC 25mm dia. Conduit /4.00 sqmm Wire For Power Circuits
IN RCC SLAB		CONDUIT		Submain Wire to DB From Main Panel on Ground Floor in 1nos. 32mm dia Conduits
CEILING	09	FAN/48"		CEILING FAN 48"
+90"	03	TL/W		LED WALL TUBE LIGHT MAKE:- SYSKA LED CAT NO:-SSK-15-20W
CEILING	40	DL		LED 6" DOWN LIGHTER 20W (SURFACE MOUNTED) MAKE:- SYSKA LED CAT NO:-SDL-15W GLD 6.5K/4K
VENTILATOR HT.	04	CR		CEILING ROSE
VENTILATOR HT.	04	EXF		9" DIA EXHAUST FAN
+42"	06	SB		SWITCH BOARD
+36"	01	SET-1		1No. Telephone Jack, 1No. Data Jack For Computer Point, 2No. 6A Socket Controlled by 1No. 16A Switch For UPS & 1No. 16A 5Pin Socket Controlled by 1No. 16A Switch For Raw
+18"	01	SET-2		1No. Telephone Jack, 1No. TV Coaxial Jack, 1Nos. 6A Socket Controlled by 1No. 6A Switch & 1Nos. 16A 5Pin Socket Controlled by 1No. 16A Switch
+90"	04	SAC		SPLIT AC INDOOR UNIT
+18"	05	PP-18"		16 A POWER POINT FOR 18" ht
+60"	01	MCB DB		MCB DISTRIBUTION BOARD

SERVICES CONSULTANT

ASHI ASSOCIATES
F 9 / 440 , Keshav Marg Chitrakut Scheme,Jaipur
PH:91-0-93146-10438, 0141-2440946,
Mail:vipul8599@yahoo.com

space edge Architects

SPACE EDGE ARCHITECTS
ARCHITECTS, ENGINEERS AND INTERIOR DESIGNERS
B-6, GANESH KRIPA, MOTI MARG BAPU NAGAR, JAIPUR -302015
Ph.: 0141-4062903, 9314510603
E-Mail: spaceedgejpr@gmail.com


PROJECT NAME :-
ELESTO -B

PROMOTER NAME :-
TEJAS HOMES

PROJECT ADDRESS :-
PROPOSED RESIDENTIAL BUILDING AT PLOT NO 04, SCHEME- APNA BUNGALOW PHASE-3 (NIJI KHATEDARI), VILLAGE- ASARAPURA, TEHSIL-SANGANER,JAIPUR, RAJASTHAN



DRAWING:
BASEMENT FLOOR
ELECTRIC CONDUIT PLAN

DRN. BY:- RAJENDER	DATE 17-03-2025
CHKD. BY:- SANJAY	
APPD. BY:- VIPUL AGARWAL	

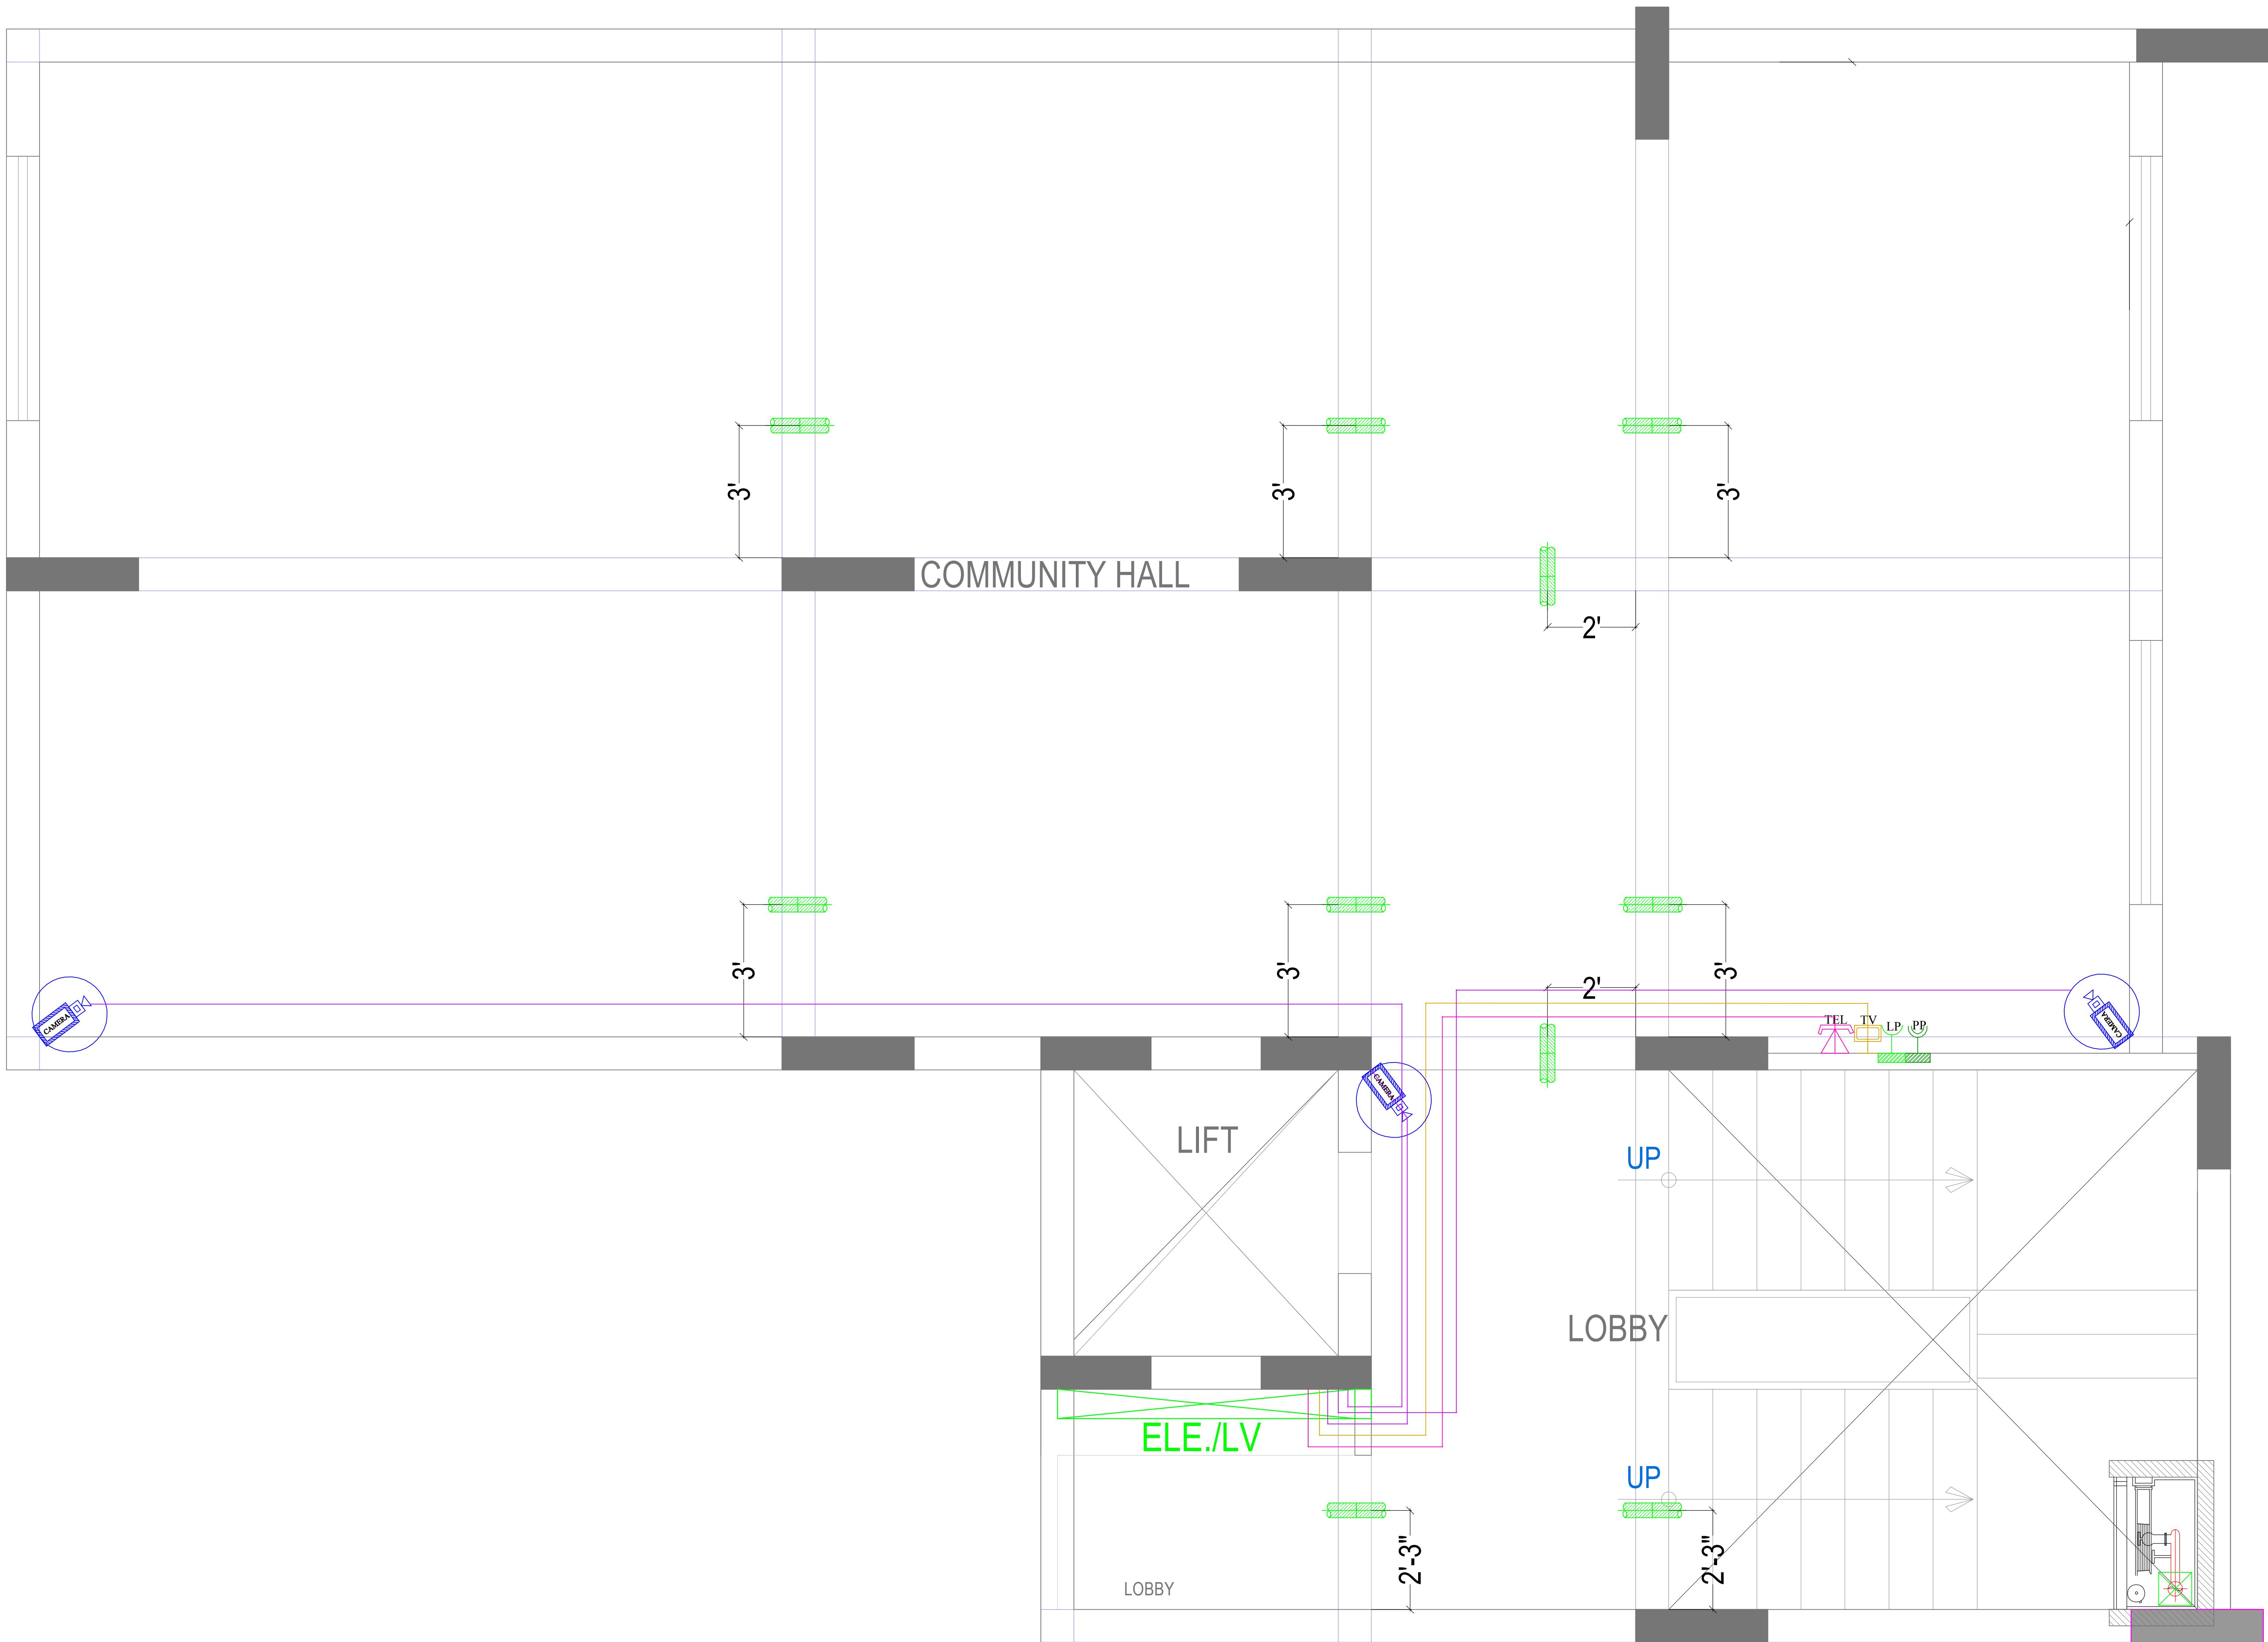

BASEMENT FLOOR PLAN

TEL, TV, UPS, PB
SET-1


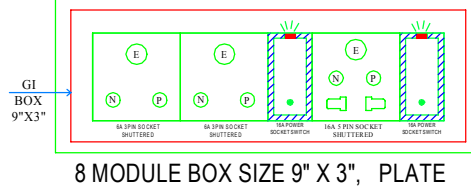


8 MODULE BOX SIZE 9" X 3", PLATE
SIZE 245 X 90 MM

1No. Telephone Jack, 1No. Data Jack For
Computer Point, 2No. 6A Socket Controlled by
1No. 16A Switch For UPS & 1No. 16A 5Pin
Socket Controlled by 1No. 16A Switch For Raw

+36"

TEL, TV, UPS, PB
SET

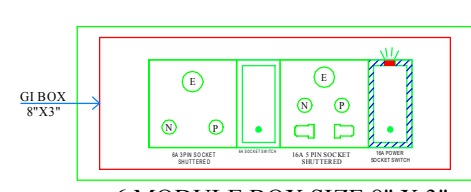


6 MODULE BOX SIZE 8" X 3",
PLATE SIZE 226 X 90 MM

1No. Telephone Jack, 1No. TV Coaxial Jack,
1Nos. 6A Socket Controlled by 1No. 6A Switch &
1Nos. 16A 5Pin Socket Controlled by 1No. 16A
Switch

+18"


Slab

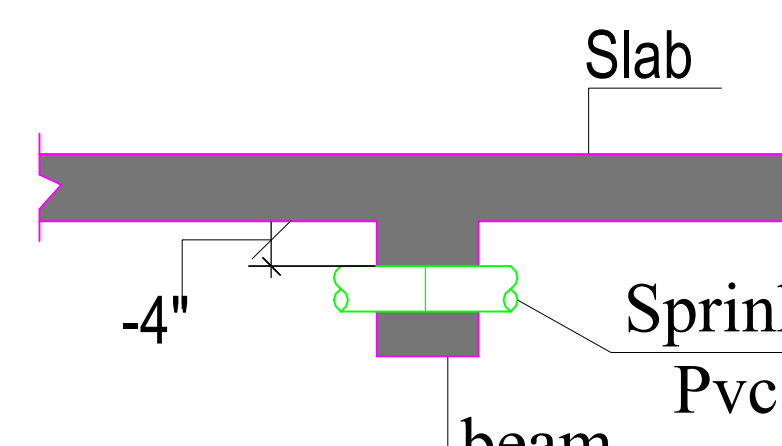

beam

Typical Section of Sleeve
in Beam for Sprinkler Pipe/ Lvl
-4" below roof bottom

LEGENDS:

Mounting Ht.	Qty.	Symbol	Description
	12		4" DIA. SPRINKLER SLEEVE
	01		CONTROL VALVE

LEGENDS:

Mounting Height	No.	ID	Symbol	Description
IN FLOOR		CONDUIT		Rigid PVC 25mm dia. Conduit (0.5mm 2 Pair Wire For Tel Wiring
IN FLOOR		CONDUIT		Rigid PVC 25mm dia. Conduit (RGS Cable For TV Wiring
IN RCC SLAB		CONDUIT		Rigid PVC 25mm dia. Conduit (3-1 Coaxial Wire / Cat 6 UTP Cable For Security Camera (C.C.T.V.)
+90"	06	CCTV		WALL MOUNTED CCTV CAMERA
+36"	01	SET-1		1No. Telephone Jack, 1No. Data Jack For Computer Point, 2No. 6A Socket Controlled by 1No. 16A Switch For UPS & 1No. 16A 5Pin Socket Controlled by 1No. 16A Switch For Raw
+18"	01	SET-2		1No. Telephone Jack, 1No. TV Coaxial Jack, 1Nos. 6A Socket Controlled by 1No. 6A Switch & 1No. 16A 5Pin Socket Controlled by 1No. 16A Switch

SERVICES CONSULTANT

ASHI ASSOCIATES
F 9 / 440 , Keshav Marg Chitrakut Scheme,Jaipur
PH:91-0-93146-10438 ,0141-2440946,
Mail:vipul8599@yahoo.com



SPACE EDGE ARCHITECTS
ARCHITECTS, ENGINEERS AND INTERIOR DESIGNERS
B-6, GANESH KRIPA, MOTI MARG
BAPU NAGAR, JAIPUR -302015
Ph.: 0141-4062903, 9314510603
E-Mail: spaceedgejpr@gmail.com

PROJECT NAME :-
ELESTO -B

PROMOTER NAME :-
TEJAS HOMES

PROJECT ADDRESS :-
PROPOSED RESIDENTIAL BUILDING AT PLOT
NO 04, SCHEME- APNA BUNGALOW PHASE-3
(NUI KHATEDARI), VILLAGE- ASARAPURA,
TEHSIL-SANGANER,JAIPUR, RAJASTHAN

DRAWING: BASEMENT FLOOR
LV CONDUIT & SPRINKLER
SLEEVE PLAN

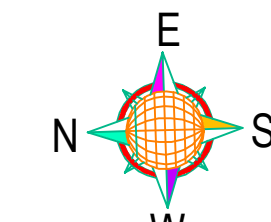DRN. BY:- RAJENDER	DATE 17-03-2025
CHKD. BY:- SANJAY	
APPD. BY:- VIPUL AGARWAL	



Vipul
VIPUL AGARWAL
M.E.P. CONSULTANT
B.E. ELECTRICAL

LEGEND:-

----- **FRAMING BEAM**

LEGENDS:				
Mounting Height	No.	ID	Symbol	Description
IN RCC SLAB		CONDUIT		Rigid PVC 25mm dia. Conduit /1.5 sqmm Wire For Light Points
IN RCC SLAB		CONDUIT		Rigid PVC 25mm dia. Conduit /2.5 sqmm Wire For Light Circuits
IN RCC SLAB		CONDUIT		Submain Wire to DB From Main Panel on Ground Floor in 1nos. 32mm dia Conduits
CEILING	40	TL/C		LED CEILING TUBE LIGHT MAKE:- SYSKA LED CAT NO:- SSL-15-20W
CEILING	65	DL		Led 6" Down Lighter 20W (Surface Mounted) Make:- Syska Led Cat no:- SDL-15W GLD 6.5K/4K
+42"	02	SB		SWITCH BOARD
VENTILATOR HT.	01	CR		CEILING ROSE
VENTILATOR HT.	01	EXF		9" DIA FRESH AIR FAN
+78"	01	ML		12X2 LED MIRROR LIGHT MAKE:- SYSKA LED CAT NO:- FPL-12X2
+60"	01	MCB DB		MCB DISTRIBUTION BOARD

SERVICES CONSULTANT

ASHI ASSOCIATES
F 9 / 440 , Keshav Marg Chitrakut Scheme,Jaipur
PH:91-0-93146-10438 ,0141-2440946,
Mail:vipul8599@yahoo.com



SPACE EDGE ARCHITECTS
ARCHITECTS, ENGINEERS AND INTERIOR DESIGNERS
**B-6, GANESH KRIPA, MOTI MARG
BAPU NAGAR, JAIPUR -302015**
Ph.: 0141-4062903, 9314510603
E-Mail: spaceedgejpr@gmail.com

PROJECT NAME :-
ELESTO -B

PROMOTER NAME :-
TEJAS HOMES

PROJECT ADDRESS :-
PROPOSED RESIDENTIAL BUILDING AT PLOT
NO 04, SCHEME- APNA BUNGALOW PHASE-3
(NIJI KHATEDARI), VILLAGE- ASARAPURA,
TEHSIL-SANGANER,JAIPUR, RAJASTHAN

DRAWING:
**STILT FLOOR ROOF
ELECTRIC CONDUIT PLAN**

DRN. BY:-	RAJENDER	DATE	08-04-2025
CHKD. BY:-	SANJAY		
APPD. BY:-	VIPUL AGARWAL		



GROUND FLOOR WORKING PLAN

Vipul
VIPUL AGARWAL
M.E.P. CONSULTANT
B.E. ELECTRICAL

LEGENDS:				
Mounting Height	No.	ID	Symbol	Description
IN FLOOR		CONDUIT	TEL	Rigid PVC 25mm dia. Conduit /0.5mm 2 Pair Wire For Tel Wiring
IN FLOOR		CONDUIT	TV	Rigid PVC 25mm dia. Conduit /RG6 Cable For TV Wiring
IN RCC SLAB		CONDUIT		1Nos. 32 mm dia Conduits From Flat LV System to Drop LV Shaft
IN FLOOR		CONDUIT	TV	Rigid PVC 25mm dia. Conduit /RG6 Cable for TV Tag Box to Balcony Dish TV
IN RCC SLAB		CONDUIT	CCTV	Rigid PVC Conduit 25mm/3-1 Coaxial Wire/Cable Cable for Video Door Phone & Security Camera (C.C.T.V.).
IN RCC SLAB		CONDUIT	FIRE	Rigid PVC 25mm dia. Conduit / 2X1.5 sq. mm Copper Wire For Fire Alarm
+24"	28	TEL		TELEPHONE POINT
+24"	28	LP TEL		6 A PLUG POINT FOR TELEPHONE
+48"	28	TV		TV COAXIAL POINT
+48"	56	LP TV		6 A PLUG POINT FOR TV
+24"	07			LV JOINT BOX
+42"	01	MCP		MANUAL CALL POINT
+90"	01	HO		HOOTER POINT
+90"	01	CCTV		WALL MOUNTED CCTV CAMERA

SERVICES CONSULTANT


ASHI ASSOCIATES


F 9 / 440 , Keshav Marg Chitrakut Scheme,Jaipur
PH:91-0-93146-10438 ,0141-2440946,
Mail:vipul8599@yahoo.com

space edge Architects

SPACE EDGE ARCHITECTS
ARCHITECTS, ENGINEERS AND INTERIOR DESIGNERS
B-6, GANESH KRIPA, MOTI MARG
BAPU NAGAR, JAIPUR -302015
Ph.: 0141-4062903, 9314510603
E-Mail: spaceedgejpr@gmail.com

PROJECT NAME :-		ELESTO -B
PROMOTER NAME :-		TEJAS HOMES
PROJECT ADDRESS :-		PROPOSED RESIDENTIAL BUILDING AT PLOT NO 04, SCHEME- APNA BUNGALOW PHASE-3 (NIJI KHATEDARI), VILLAGE- ASARAPURA, TEHSIL-SANGANER,JAIPUR, RAJASTHAN
DRAWING:		GROUND FLOOR ROOF LV CONDUIT PLAN
DRN. BY:-	DATE	
RAJENDER	10-05-2025	
CHKD. BY:-		
SANJAY		
APPD. BY:-		
VIPUL AGARWAL		

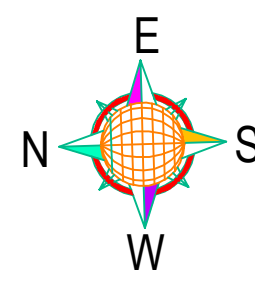

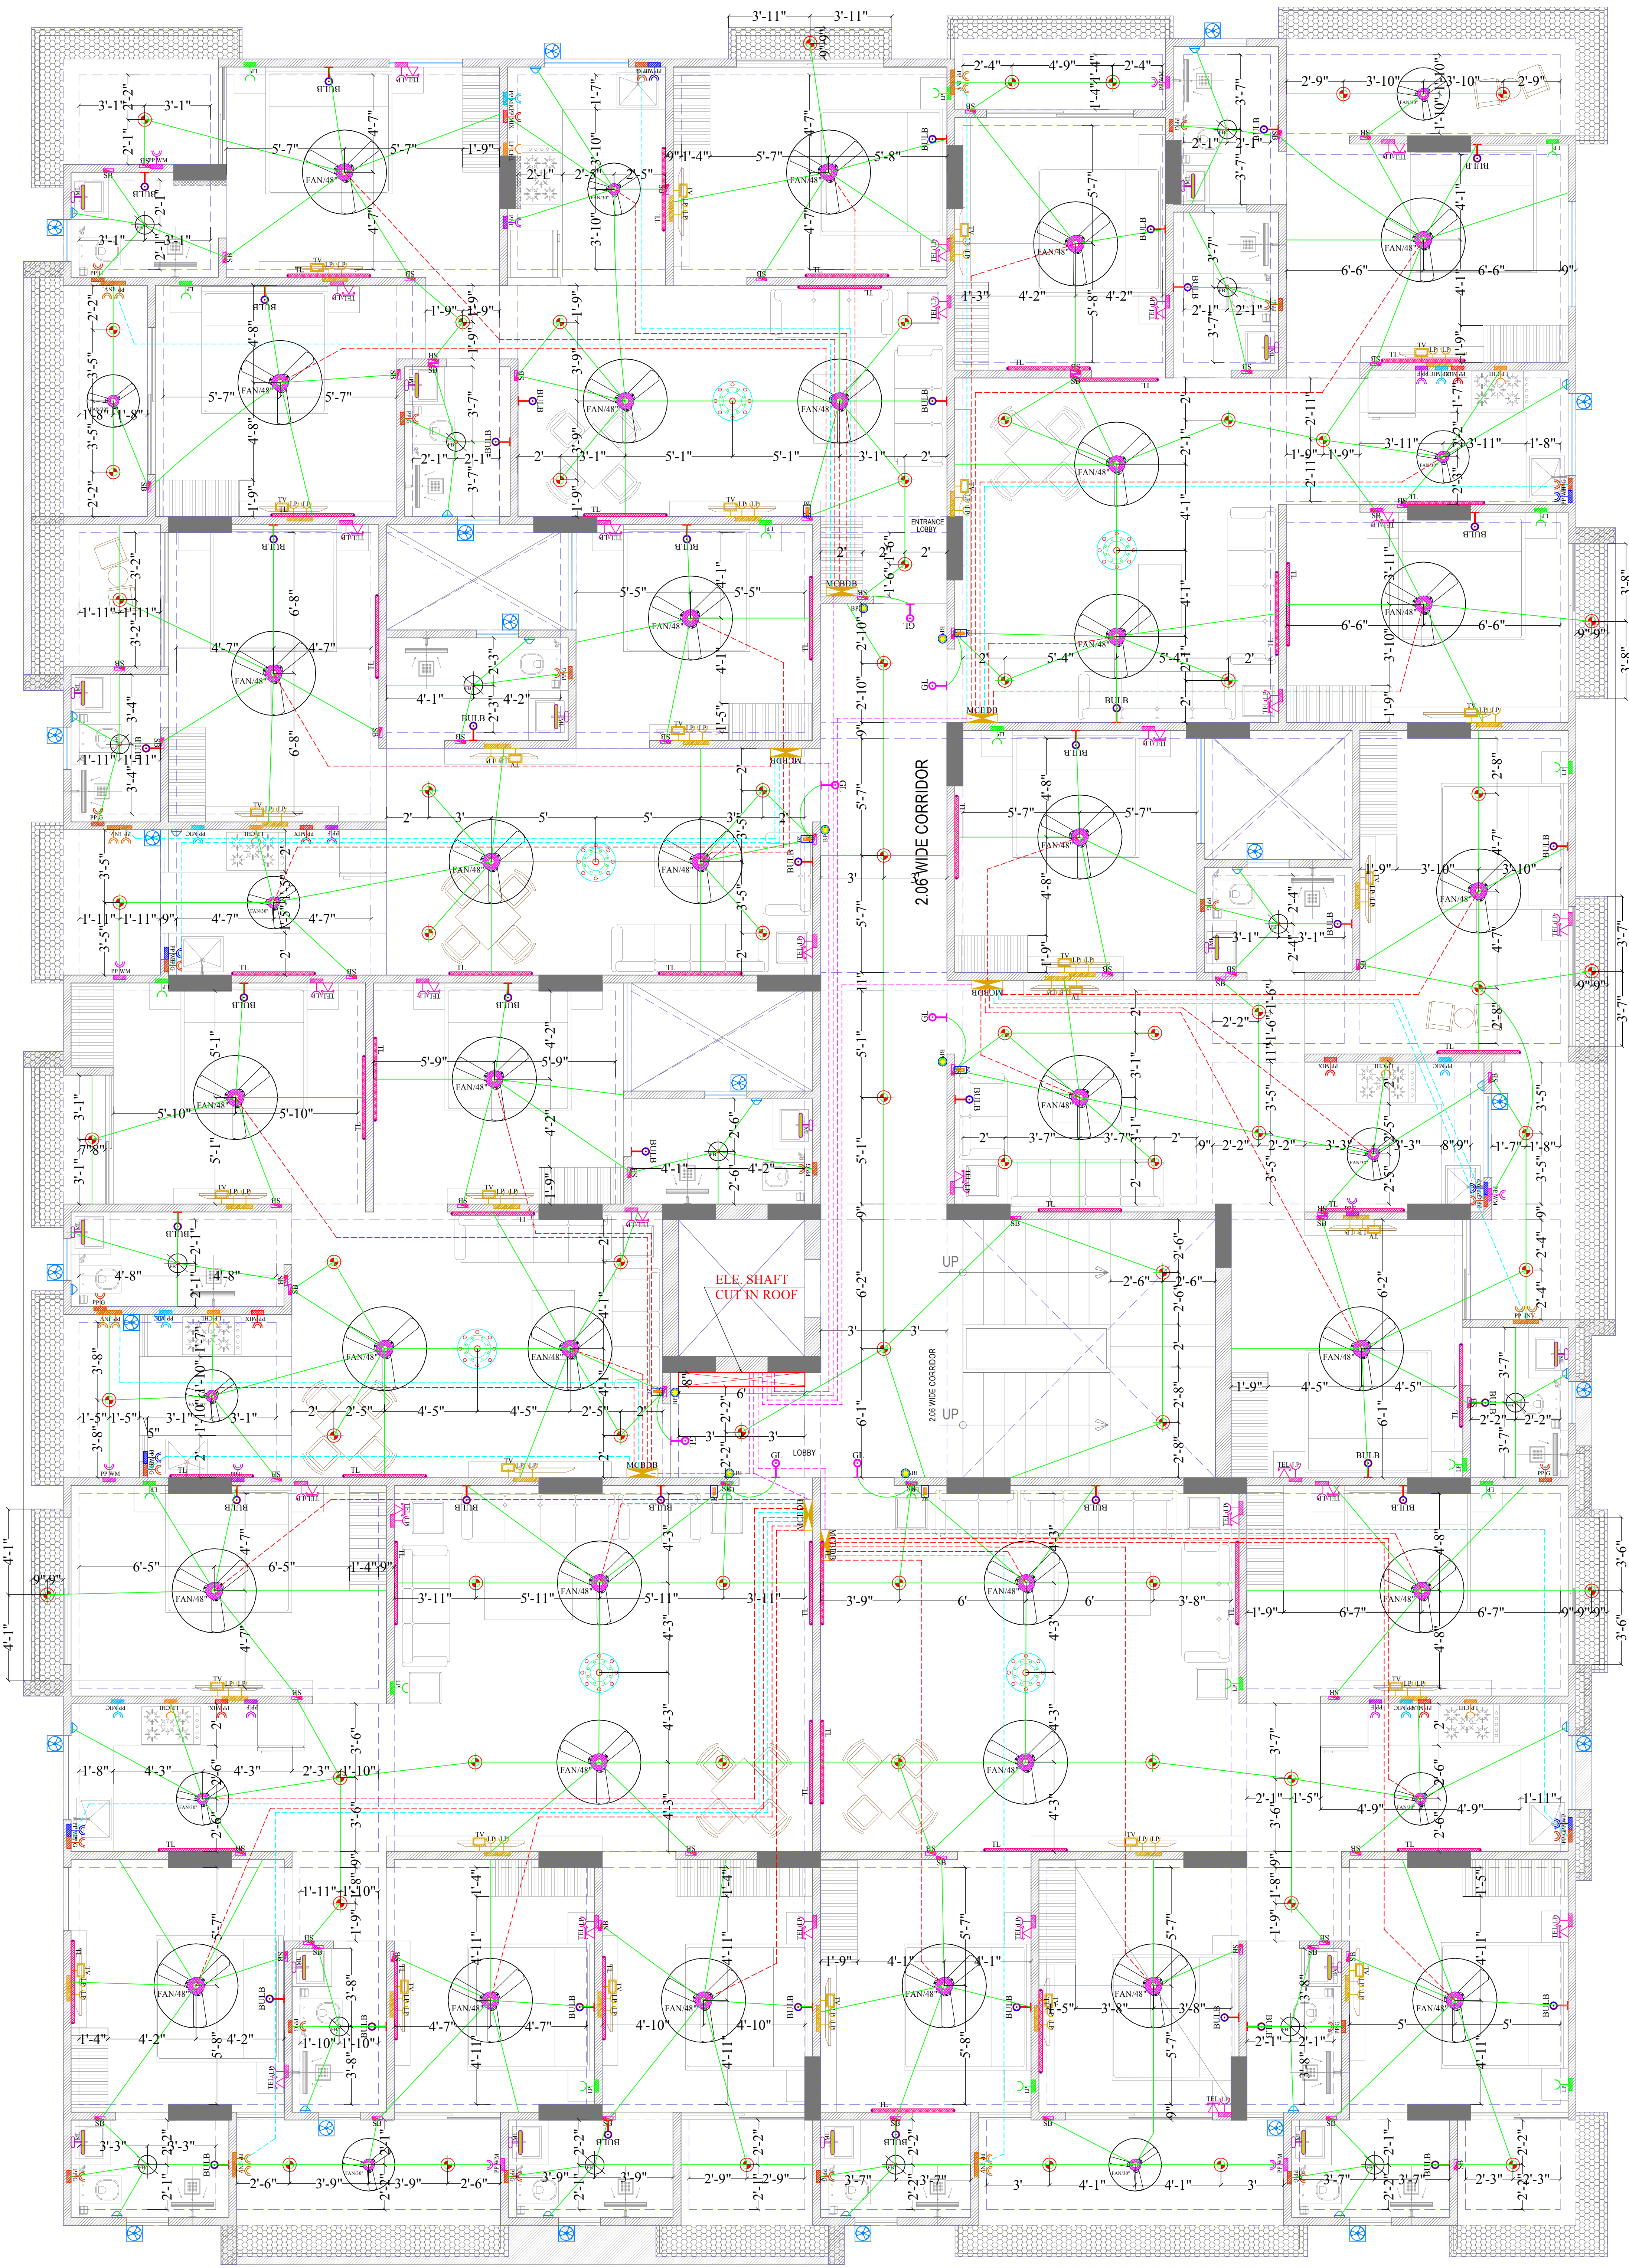

GROUND FLOOR WORKING PLAN

Vipul
VIPUL AGARWAL
M.E.P. CONSULTANT
B.E. ELECTRICAL

LEGENDS:				
Mounting Height	No.	ID	Symbol	Description
IN RCC SLAB		CONDUIT		Rigid PVC 25mm dia. Conduit / 1.5 sqmm Wire For Light Points
IN RCC SLAB		CONDUIT		Rigid PVC 25mm dia. Conduit / 2.5 sqmm Wire For Light Circuits
IN RCC SLAB		CONDUIT		Rigid PVC 25mm dia. Conduit / 4.00 sqmm Wire For Power Circuits
IN RCC SLAB		CONDUIT		Submain Wire to DB From Main Panel on Ground Floor in 1nos. 32mm dia Conduits
CEILING	34	FAN/48"		CEILING FAN 48"
CEILING	11	FAN/30"		CEILING FAN 30"
CEILING	16	FB		FAN BOX
CEILING	06	CH1		CHANDELIER
+90"	41	TL/W		LED WALL TUBE LIGHT MAKE:-SYSKA LED CAT NO.-SSK-TS-20W
+90"	45	BULB		LED BULB 20W MAKE:-SYSKA LED CAT NO.-SSK-20W 5.7K/3K
+90"	07	GL		WALL BRACKETS AS DESIGN FOR GANESH LIGHT
+78"	16	ML		12X2 LED MIRROR LIGHT MAKE:-SYSKA LED CAT NO.-FPL-12X2
CEILING	70	DL		LED 6" DOWN LIGHTER 20W (SURFACE MOUNTED) MAKE:-SYSKA LED CAT NO.-SDL-15W GLD 6.5K/4K
VENTILATOR HT.	22	CR		CEILING ROSE
VENTILATOR HT.	22	EXP		9" DIA EXHAUST FAN
+42"	72	SB		SWITCH BOARD
+24"	28	TEL		TELEPHONE POINT
+24"	28	LP TEL		6 A PLUG POINT FOR TELEPHONE
+48"	28	TV		TV COAXIAL POINT
+48"	56	LP TV		6 A PLUG POINT FOR TV
+24"	19	LP		6 A PLUG POINT FOR SIDE TABLE
+72"	07	LP-CH		6 A PLUG POINT FOR CHIMNEY
+42"	07	PP-MIX		16 A POWER POINT FOR MIXER
+42"	07	PP-MIC		16 A POWER POINT FOR MICROWAVE
+78"	23	PP-G		16 A POWER POINT FOR GEYSER
+54"	07	PP-F		16 A POWER POINT FOR FRIDGE
+78"	07	PP-WP		16 A POWER POINT FOR WATER PURIFIER
+48"	07	PP-WM		16 A POWER POINT FOR WASHING MACHINE
+12"	07	PP-INV.		16 A POWER POINT FOR INVERTOR
+60"	07	BP		6 A BELL PUSH
+90"	07	BZ		BUZZER FOR CALL BELL
+60"	07	MCB DB		MCB DISTRIBUTION BOARD

SERVICES CONSULTANT

ASHI ASSOCIATES

F 9 / 440 , Keshav Marg Chitrakut Scheme,Jaipur
PH:91-0-93146-10438 ,0141-2440946,
Mail:vipul8599@yahoo.com

space edge Architects


SPACE EDGE ARCHITECTS

ARCHITECTS, ENGINEERS AND INTERIOR DESIGNERS

B-6, GANESH KRIPA, MOTI MARG
BAPU NAGAR, JAIPUR -302015

Ph.: 0141-4062903, 9314510603
E-Mail: spaceedgejpr@gmail.com

PROJECT NAME :-	ELESTO -B
PROMOTER NAME :-	TEJAS HOMES
PROJECT ADDRESS :-	PROPOSED RESIDENTIAL BUILDING AT PLOT NO 04, SCHEME- APNA BUNGALOW PHASE-3 (NIJI KHATEDARI), VILLAGE- ASARAPURA, TEHSIL-SANGANER,JAIPUR, RAJASTHAN
DRAWING:	GROUND FLOOR ROOF ELECTRIC CONDUIT PLAN
DRN. BY:-	DATE
RAJENDER	10-05-2025
CHKD. BY:-	
APPD. BY:-	
VIPUL AGARWAL	

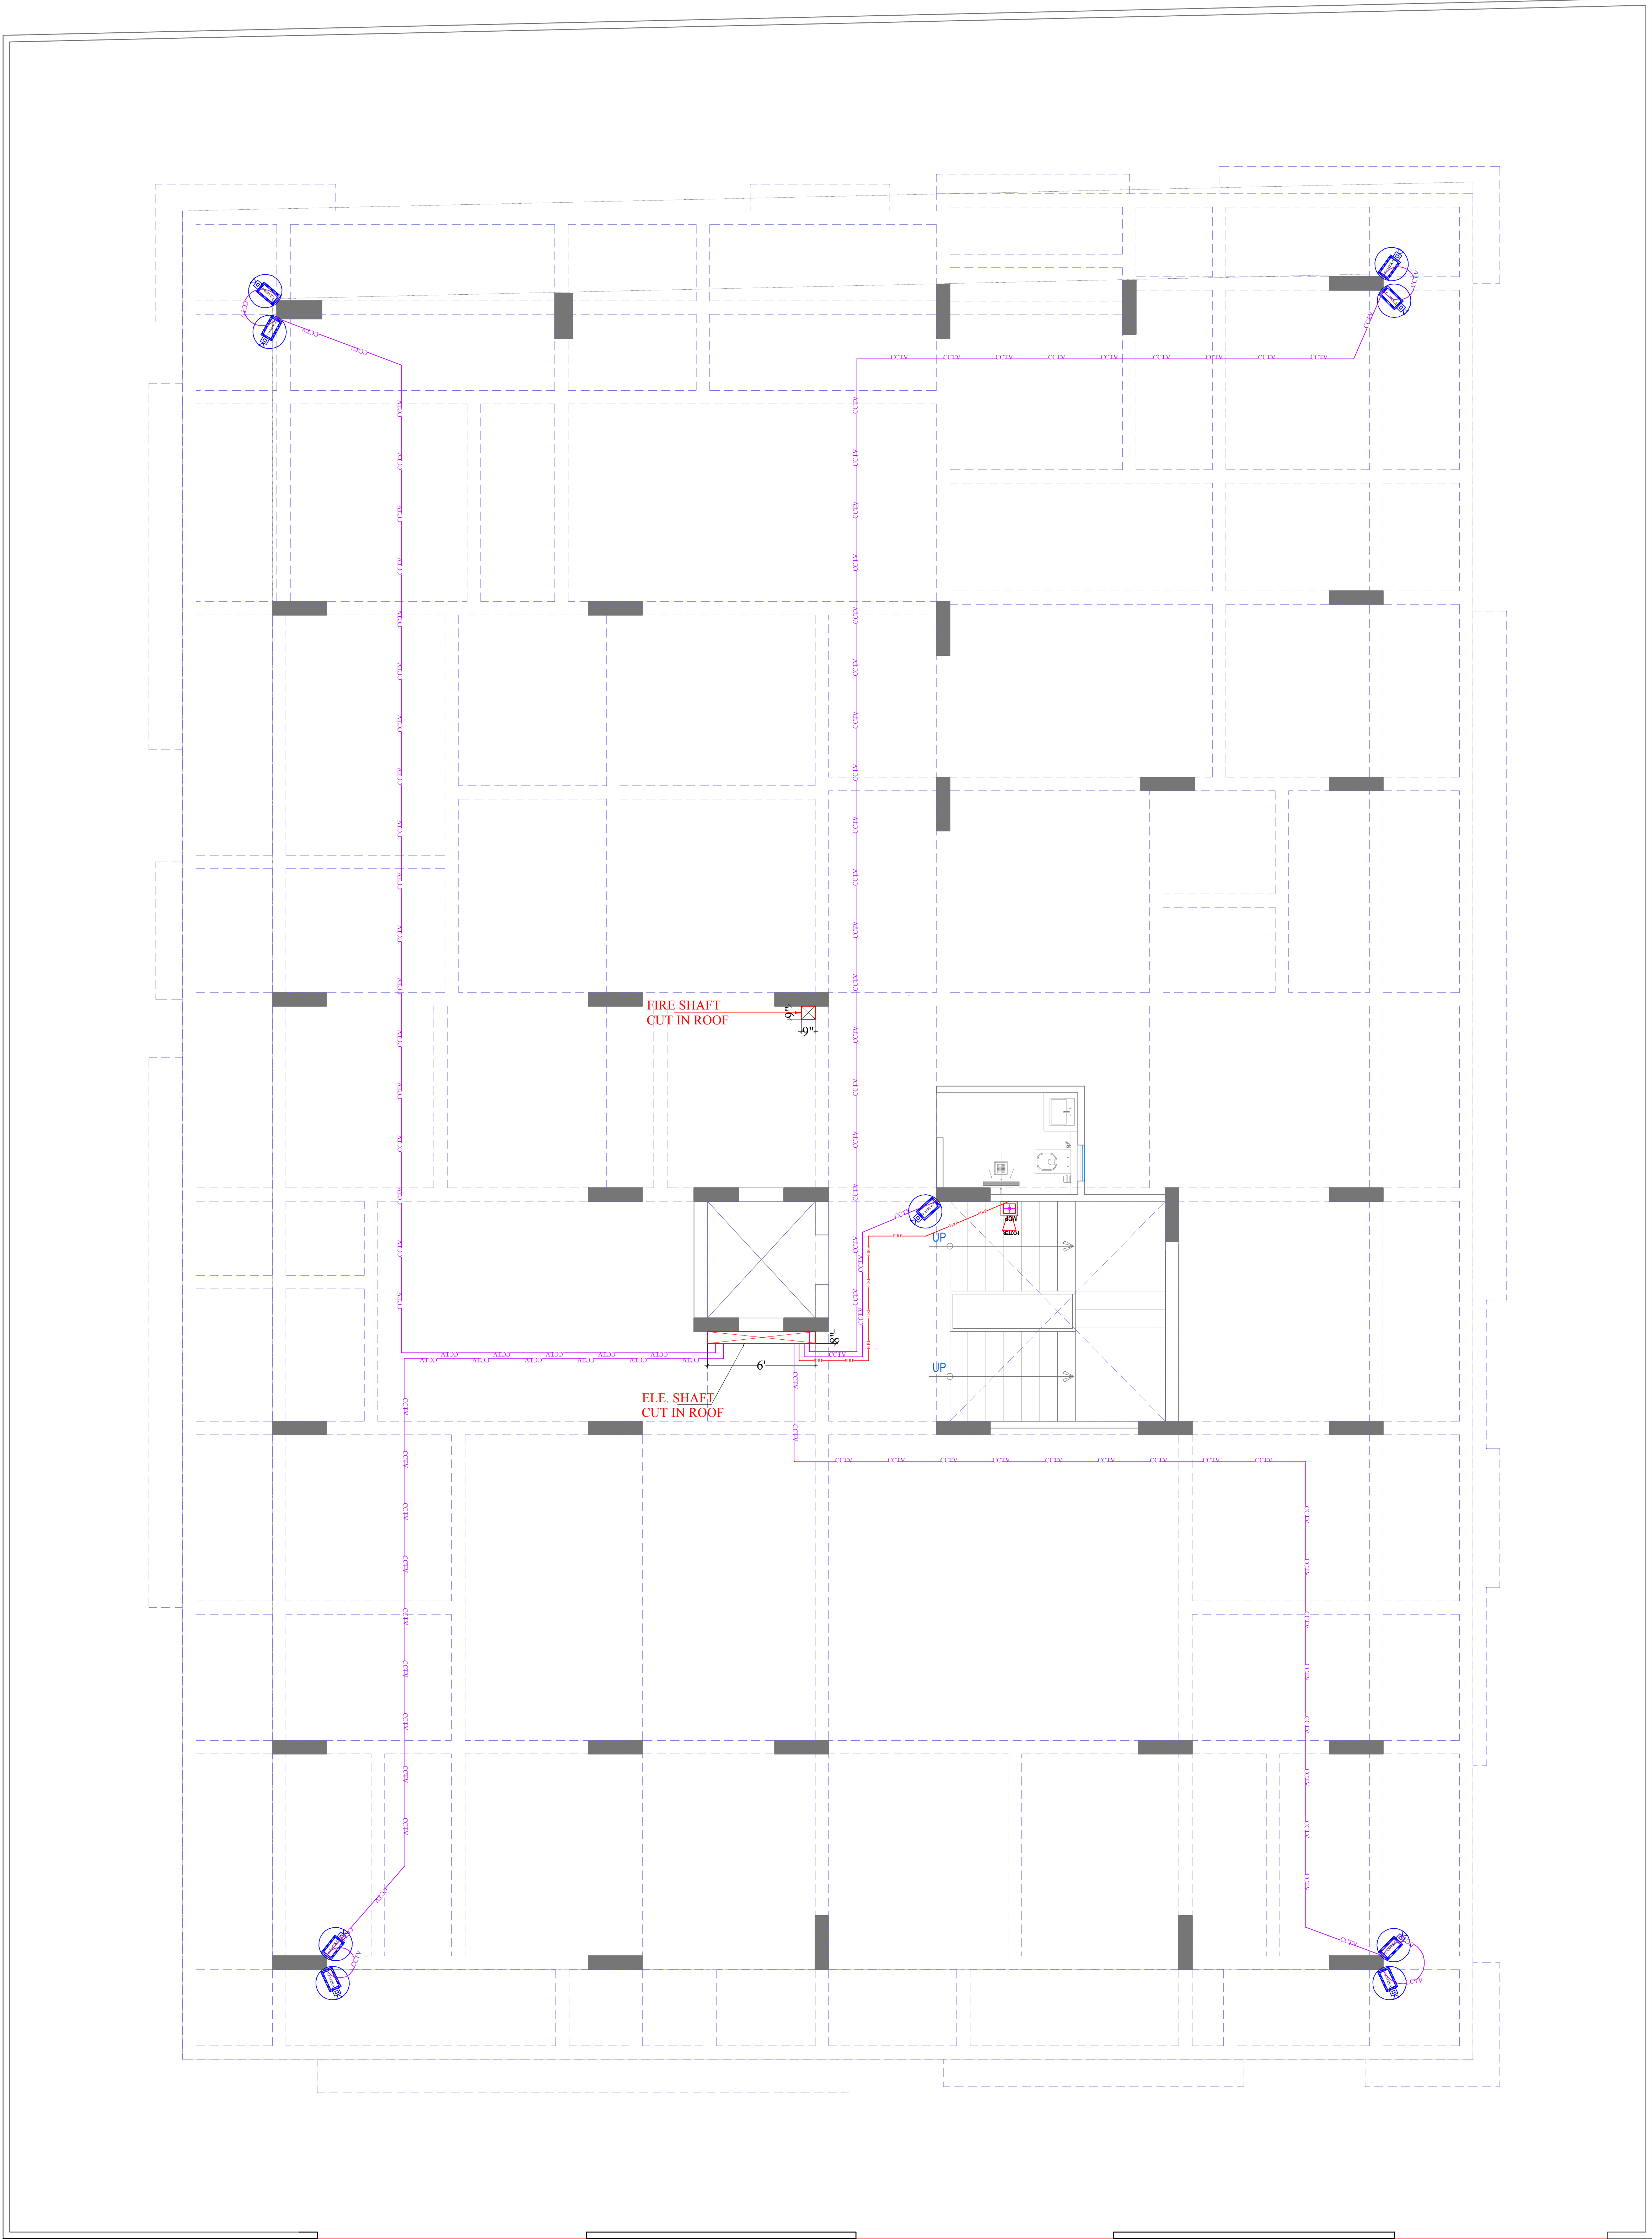

Vipul
VIPUL AGARWAL
M.E.P. CONSULTANT
B.E. ELECTRICAL

LEGEND:-

FRAMING BEAM

LEGENDS:

Mounting Height	No.	I D	Symbol	Description
IN RCC SLAB		CONDUIT	FIRE	Rigid PVC 25mm dia. Conduit / 2X1.5 sq. mm Copper Wire For Fire Alarm
IN RCC SLAB		CONDUIT	CCTV	Rigid PVC 25mm dia. Conduit / 3+1 Coaxial Wire / Cat 6 UTP Cable For Security Camera (C.C.T.V.).
+42"	01	MCP		MANUAL CALL POINT
+90"	01	HO		HOOTER POINT
+90"	09	CCTV		WALL MOUNTED CCTV CAMERA

SERVICES CONSULTANT

ASHI ASSOCIATES

F 9 / 440 , Keshav Marg Chitrakut Scheme,Jaipur
PH:91-0-93146-10438 ,0141-2440946,
Mail:vipul8599@yahoo.com



SPACE EDGE ARCHITECTS
ARCHITECTS, ENGINEERS AND INTERIOR DESIGNERS

B-6, GANESH KRIPA, MOTI MARG
BAPU NAGAR, JAIPUR -302015

Ph.: 0141-4062903, 9314510603
E-Mail: spaceedgejpr@gmail.com

PROJECT NAME :-

ELESTO -B

PROMOTER NAME :-

TEJAS HOMES


PROJECT ADDRESS :-


PROPOSED RESIDENTIAL BUILDING AT PLOT
NO 04, SCHEME- APNA BUNGALOW PHASE-3
(NIJI KHATEDARI), VILLAGE- ASARAPURA,
TEHSIL-SANGANER,JAIPUR, RAJASTHAN

DRAWING:

STILT FLOOR ROOF LV
CONDUIT PLAN

DRN. BY:-	DATE
RAJENDER	08-04-2025
CHKD. BY:-	
SANJAY	
APPD. BY:-	
VIPUL AGARWAL	

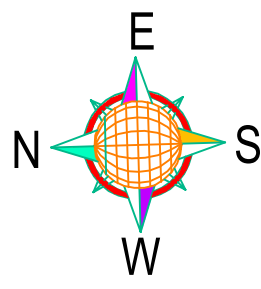

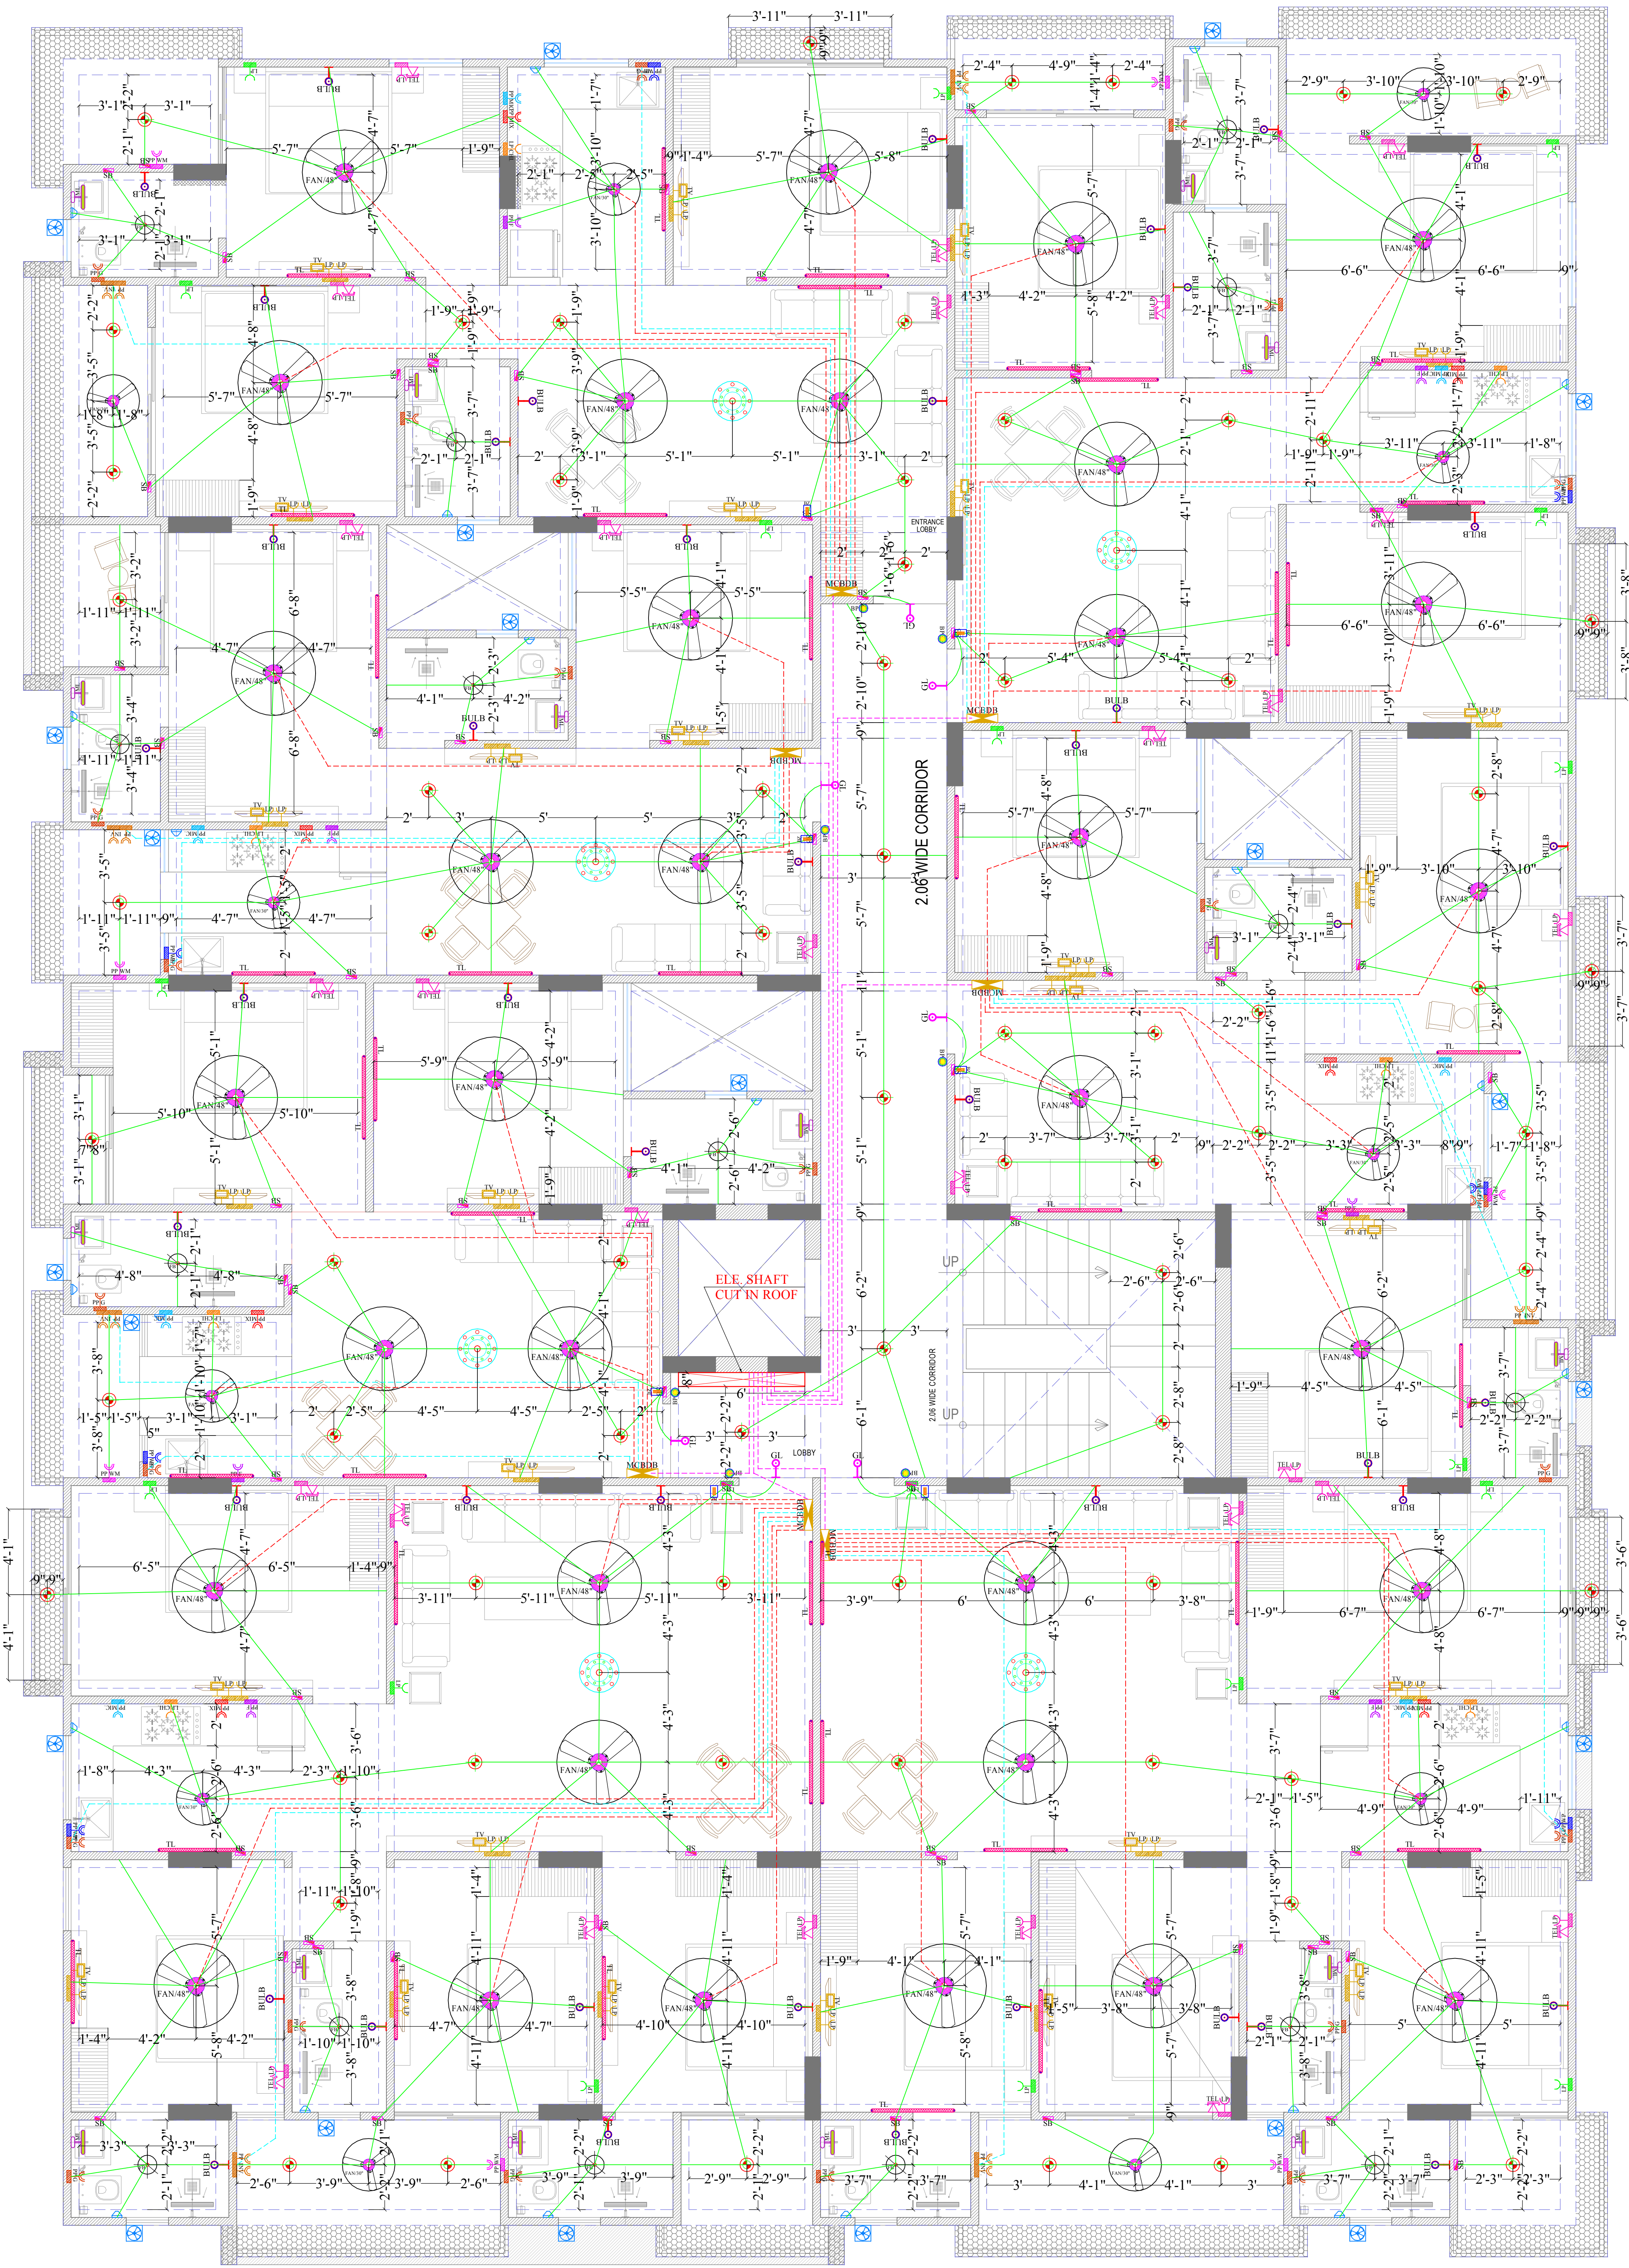

Vipul
VIPUL AGARWAL
M.E.P. CONSULTANT
B.E. ELECTRICAL

LEGEND:-

FRAMING BEAM

LEGENDS:				
Mounting Height	No.	ID	Symbol	Description
IN RCC SLAB		CONDUIT		Rigid PVC 25mm dia. Conduit /1.5 sqmm Wire For Light Points
IN RCC SLAB		CONDUIT		Rigid PVC 25mm dia. Conduit /2.5 sqmm Wire For Light Circuits
IN RCC SLAB		CONDUIT		Rigid PVC 25mm dia. Conduit /4.00 sqmm Wire For Power Circuits
IN RCC SLAB		CONDUIT		Submain Wire to DB From Main Panel on Ground Floor in 1nos. 32mm dia Conduits
CEILING	34	FAN/48"		CEILING FAN 48"
CEILING	11	FAN/30"		CEILING FAN 30"
CEILING	16	FB		FAN BOX
CEILING	06	CH1		CHANDELIER
+90"	41	TL/W		LED WALL TUBE LIGHT MAKE- SYSKA LED CAT NO- SSK-TS-20W
+90"	45	BULB		LED BULB 20W MAKE- SYSKA LED CAT NO- SSK-TS-20W
+90"	07	GL		WALL BRACKETS AS DESIGN FOR GANESH LIGHT
+78"	16	ML		12X2 LED MIRROR LIGHT MAKE- SYSKA LED CAT NO- FPL-12X2
CEILING	70	DL		LED 6" DOWN LIGHTER 20W (SURFACE MOUNTED) MAKE- SYSKA LED CAT NO- SDL-15W GLD 6.5K/4K
VENTILATOR HT.	22	CR		CEILING ROSE
VENTILATOR HT.	22	EXF		9" DIA EXHAUST FAN
+42"	72	SB		SWITCH BOARD
+24"	28	TEL		TELEPHONE POINT
+24"	28	LP TEL		6 A PLUG POINT FOR TELEPHONE
+48"	28	TV		TV COAXIAL POINT
+48"	56	LP TV		6 A PLUG POINT FOR TV
+24"	19	LP		6 A PLUG POINT FOR SIDE TABLE
+72"	07	LP-CH		6 A PLUG POINT FOR CHIMNEY
+42"	07	PP-MIX		16 A POWER POINT FOR MIXER
+42"	07	PP-MIC		16 A POWER POINT FOR MICROWAVE
+78"	23	PP-G		16 A POWER POINT FOR GEYSER
+54"	07	PP-F		16 A POWER POINT FOR FRIDGE
+78"	07	PP-WP		16 A POWER POINT FOR WATER PURIFIER
+48"	07	PP-WM		16 A POWER POINT FOR WASHING MACHINE
+12"	07	PP-INV.		16 A POWER POINT FOR INVERTOR
+60"	07	BP		6 A BELL PUSH
+90"	07	BZ		BUZZER FOR CALL BELL
+60"	07	MCB DB		MCB DISTRIBUTION BOARD

SERVICES CONSULTANT

ASHI ASSOCIATES
F 9 / 440 , Keshav Marg Chitrakut Scheme,Jaipur
PH:91-0-93146-10438 ,0141-2440946,
Mail:vipul8599@yahoo.com

space edge Architects

SPACE EDGE ARCHITECTS
ARCHITECTS, ENGINEERS AND INTERIOR DESIGNERS
B-6, GANESH KRIPA, MOTI MARG
BAPU NAGAR, JAIPUR -302015
Ph.: 0141-4062903, 9314510603
E-Mail: spaceedgejpr@gmail.com

PROJECT NAME :-	ELESTO -B
PROMOTER NAME :-	TEJAS HOMES
PROJECT ADDRESS :-	PROPOSED RESIDENTIAL BUILDING AT PLOT NO 04, SCHEME- APNA BUNGALOW PHASE-3 (NIJI KHATEDARI), VILLAGE- ASARAPURA, TEHSIL-SANGANER,JAIPUR, RAJASTHAN
DRAWING:	1ST TO 5TH FLOOR ROOF ELECTRIC CONDUIT PLAN
DRN. BY:-	DATE
CHKD. BY:-	10-05-2025
APPD. BY:-	
RAJENDER	
SANJAY	
VIPUL AGARWAL	



LEGEND:-



Vipul
VIPUL AGARWAL
M.E.P. CONSULTANT
B.E. ELECTRICAL

LEGENDS:

Mounting Height	No.	ID	Symbol	Description
IN FLOOR		CONDUIT	TEL	Rigid PVC 25mm dia. Conduit 0.5mm 2 Pair Wire For Tel Wiring
IN FLOOR		CONDUIT	TV	Rigid PVC 25mm dia. Conduit /RG6 Cable For TV Wiring
IN RCC SLAB		CONDUIT		1Nos. 32 mm dia Conduits From Flat LV System to Drop LV Shaft
IN FLOOR		CONDUIT	TV	Rigid PVC 25mm dia. Conduit /RG6 Cable for TV Tag Box to Balcony Dish TV
IN RCC SLAB		CONDUIT	CCTV	Rigid PVC Conduit 25mm/3+1 Coaxial Wire/Cat-6 Cable for Video Door Phone & Security Camera (C.C.T.V.).
IN RCC SLAB		CONDUIT	FIRE	Rigid PVC 25mm dia. Conduit / 2X1.5 sq. mm Copper Wire For Fire Alarm
+24"	28	TEL		TELEPHONE POINT
+24"	28	LP TEL		6 A PLUG POINT FOR TELEPHONE
+48"	28	TV		TV COAXIAL POINT
+48"	56	LP TV		6 A PLUG POINT FOR TV
+24"	07			LV JOINT BOX
+42"	01	MCP		MANUAL CALL POINT
+90"	01	HO		HOOTER POINT
+90"	01	CCTV		WALL MOUNTED CCTV CAMERA

SERVICES CONSULTANT

ASHI ASSOCIATES

F 9 / 440 , Keshav Marg Chitrakut Scheme,Jaipur
PH:91-0-93146-10438 ,0141-2440946,
Mail:vipul8599@yahoo.com



SPACE EDGE ARCHITECTS
ARCHITECTS, ENGINEERS AND INTERIOR DESIGNERS

B-6, GANESH KRIPA, MOTI MARG
BAPU NAGAR, JAIPUR -302015

Ph.: 0141-4062903, 9314510603
E-Mail: spaceedgejpr@gmail.com

PROJECT NAME :-

ELESTO -B

PROMOTER NAME :-

TEJAS HOMES

PROJECT ADDRESS :-

PROPOSED RESIDENTIAL BUILDING AT PLOT
NO 04, SCHEME- APNA BUNGALOW PHASE-3
(NIJI KHATEDARI), VILLAGE- ASARAPURA,
TEHSIL-SANGANER,JAIPUR, RAJASTHAN

DRAWING:

1ST TO 5TH FLOOR ROOF
LV CONDUIT PLAN

DRN. BY:-

RAJENDER

DATE

10-05-2025

CHKD. BY:-

SANJAY

APPD. BY:-

VIPUL AGARWAL

